



Straight Surface Probes



- Standard Frequency Range is **50-500 kHz**.
- For Frequency Range of **200 kHz–2 MHz** add a **/H** at the end of the part number
- Standard Probe Length is 3.0". Other lengths Available by Request
- Select either Microdot or Fischer Triaxial connector
- Probes with Fischer Triaxial Connectors have Integral Reference Coils




Microdot



Fischer Triax

Part Number Example

VM2500F-3

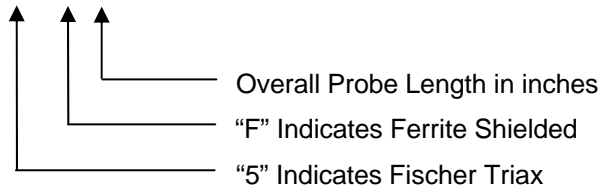

Part #	CONNECTOR TYPE				FREQUENCY
	Unshielded Microdot	Ferrite Shielded Microdot	Unshielded Triax	Ferrite Shielded Triax	50 kHz to 500 kHz
VM200-3	✓				✓
VM200F-3		✓			✓
VM2500-3			✓		✓
VM2500F-3				✓	✓

