




# Flexible Copper Shaft Probes with Stainless Steel Tips



- Standard Frequency Range is **50-500 kHz**.
- For Frequency Range of **200 kHz–2 MHz** add a **/H** at the end of the part number
- Standard Probe Length is 6.0". Other lengths Available by Request
- Standard Probe Drop is 1/2". Other Drop Lengths Available by Request
- Probes with Fischer Triaxial Connectors have Integral Reference Coils

## Part Number Example

**VM2502RAFX-1/2 x 6**

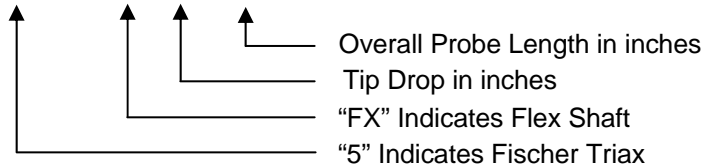

**Fischer Triax**



**Microdot**

Part #	CONNECTOR TYPE		FREQUENCY
	Ferrite Shielded Microdot	Ferrite Shielded Triax	50 kHz to 500 kHz
<b>Straight Shaft</b>			
VM200FX-6	✓		✓
VM2529UP-1/4 x 6		✓	✓
<b>Right Angle Tip</b>			
VM202RAFX-1/2 x 6	✓		✓
VM2502RAFX-1/2 x 6		✓	✓
<b>Right Angle Tip Split Core Differential</b>			
VM202RAFX-1.375DC		✓	✓
<b>45° Angle Tip</b>			
VM204AFX-6	✓		✓
VM2504AFX-6		✓	✓

